

POLY Series



210 l/min
55.5 USGPM



249 l/min
65.8 USGPM



15 bar
218 P.S.I.

Pompe a 5 membrane-pistone semidrauliche

Five piston semi-hydraulic diaphragm pump.

Мембранно-поршневой насос с 5 полугидравлическими узлами

POLY 2210

55.6000.97.3 - VD

55.6002.97.3 - VM

55.6015.97.3 - VC

55.6016.97.3 - VC2


POLY 2240

55.7000.97.3 - VD

55.7001.97.3 - VM

55.7002.97.3 - VC

55.7003.97.3 - VC2

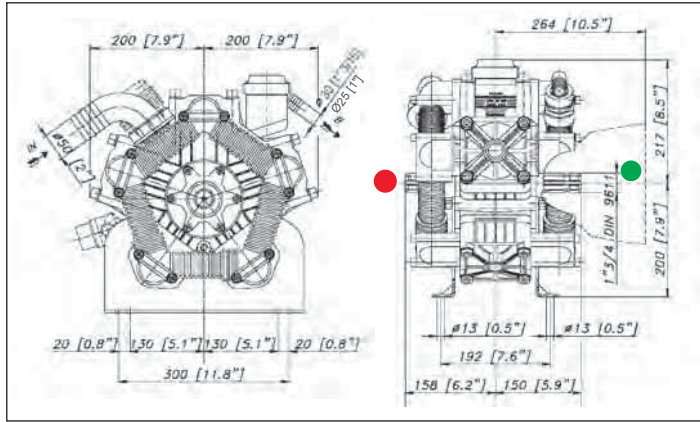

Optional - Optional - По заказу





TABELLA RENDIMENTI - PERFORMANCE CHART - ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ

POLY 2210		g/min; R.P.M.; об/мин								POLY 2240		g/min; R.P.M.; об/мин							
g/min R.P.M. → об/мин;	BAR P.S.I.	400		450		500		550		g/min R.P.M. → об/мин;	BAR P.S.I.	400		450		500		550	
		L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP			L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2	29	153	0,6	172	0,7	191	0,7	210	0,8	2	29	181	0,7	204	0,8	226	0,9	249	1,0
		40,4	0,8	45,4	0,9	50,4	1,0	55,5	1,1			47,8	1,0	53,8	1,1	59,8	1,2	65,8	1,3
5	72,5	151	1,5	170	1,7	189	1,9	208	2,0	5	72,5	180	1,8	202	2,0	225	2,2	247	2,4
		40,0	2,0	45,5	2,2	50,0	2,5	55,0	2,7			47,5	2,4	53,4	2,7	59,3	2,9	65,3	3,2
10	145	150	2,9	169	3,3	187	3,7	206	4,0	10	145	178	3,5	200	3,9	223	4,4	245	4,8
		39,6	3,9	44,5	4,4	49,5	4,9	54,4	5,4			47,1	4,7	53,0	5,3	58,8	5,8	64,7	6,4
15	218	148	4,4	167	4,9	185	5,5	204	6,0	15	218	176	5,2	198	5,8	220	6,5	242	7,1
		39,2	5,8	44,1	6,6	49,0	7,3	53,9	8,0			46,5	6,9	52,3	7,8	58,1	8,7	63,9	9,5

ALBERO POMPA - PUMP SHAFT - ВАЛ НАСОСА



● ANT. - FRONT - ПЕР. ● ANT. - FRONT - ПЕР. ● POST. - REAR - ЗАД. ● POST. - REAR - ЗАД.

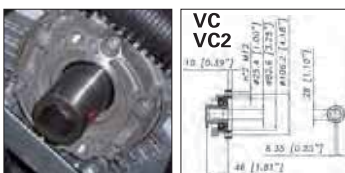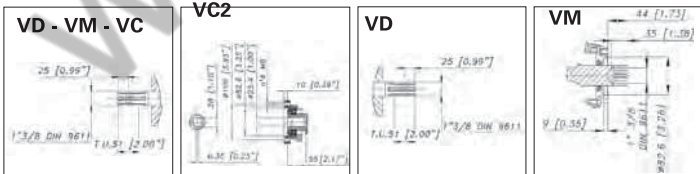

● POST. - REAR - ЗАД.

Caratteristiche tecniche

Specifications
Технические характеристики

g/min; R.P.M.; об/мин;	g/min.	R.P.M.	550	550
Peso - Weight - Вес	Kg	lb	33	72,6
Dislivello aspirazione Negative pressure Перепад уровня при всасывании	MAX	mt	ft	1,5 4,9
	Servizio discontinuo Discontinuous service - Прерывистая работа	mt	ft	3 9,8
Ø Aspirazione - Ø Intake - Ø Вход	mm	in	50	2"
Ø Mandata - Ø High pressure - Ø Выход (Poly 2210)	mm	in	25	1"
Ø Mandata - Ø High pressure - Ø Выход (Poly 2240)	mm	in	30	1"3/16
Max. Temperatura - MAX Temperature - Макс Температура	°C	°F	60	140
Tipo olio - Oil type - Тип масла	SAE	W	30	30
Capacità olio - Oil capacity - Объем масла	lt	U.S.G.	3,25	0,85