

PA Series 430.1 - 440



40
l/min

10,6
USGPM



40
bar

580
P.S.I.

PA 430.1

03.7007.97.3 - VF

03.7012.97.3-VF (900 R.P.M.)

PA 440


03.7020.97.3 - VF

03.7025.97.3 - VM

Pompa a 3 membrane-pistone semidrauliche.

Three piston semi-hydraulic diaphragm pump.

Мембранно-поршневой насос с 3 полугидравлическими узлами.

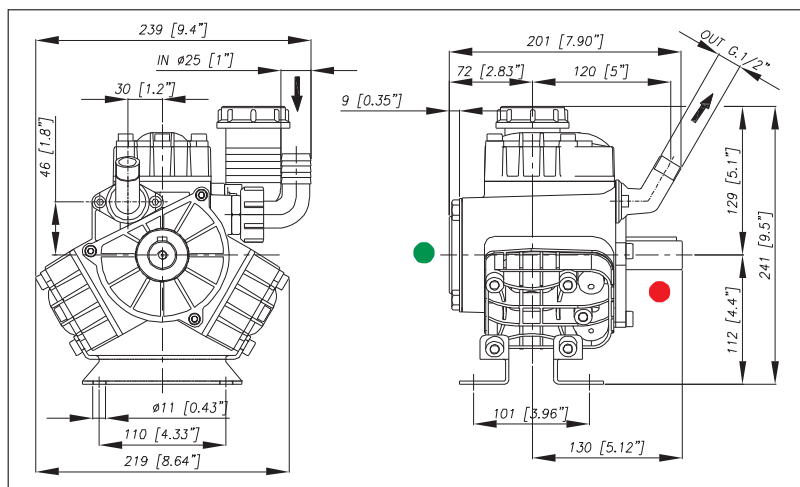

Caratteristiche tecniche

Specifications

Технические характеристики

Peso - Weight - Bec		Kg	lb	7,8	17
Distivello aspirazione Negative pressure Перепад уровня при всасывании	MAX	mt	ft	1,5	4,9
	Servizio discontinuo Discontinuous service - Прерывистая работа	mt	ft	3	9,8
Ø Aspirazione - Ø Intake - Ø Вход		mm	in	25	1"
Ø Mandata - Ø High pressure - Ø Выход		mm	in	G. 1/2	G. 1/2
Max. Temperatura - MAX Temperature - Макс Температура		°C	°F	60	140
Tipo olio - Oil type - Тип масла		SAE	W	30	30
Capacità olio - Oil capacity - Объем масла		lt	U.S.G.	0,6	0,16

Optional - Optional - По заказу



ACCESSORI - ACCESSORIES - АКЦЕССУАРЫ



ACCESSORI D'AZIONAMENTO
DRIVE ACCESSORIES

Pag. 105



DISPOSITIVI DI SICUREZZA
SAFETY ACCESSORIES

Pag. 106

Pag. 106



GRUPPI DI COMANDO
CONTROL UNITS

Pag. 92



COLLEGAMENTO
CONNECT


Pag. 107



FILTRI
FILTERS

Pag. 107

ALBERO POMPA - PUMP SHAFT - ВАЛ НАСОСА



● POST - REAR - ЗАД.

● POST - REAR - ЗАД.

● ANT. - FRONT - ПЕР.

PA 430.1 - TABELLA RENDIMENTI - PERFORMANCE CHART ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ

g/min R.P.M. → об/мин.		500		550		600		650	
BAR	P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2	29	30,8 8,1	0,1 0,2	33,8 8,9	0,1 0,2	36,9 9,8	0,1 0,2	40,0 10,6	0,2 0,2
20	290	28,5 7,5	1,1 1,5	31,3 8,3	1,2 1,6	34,2 9,0	1,3 1,8	37,0 9,8	1,5 1,9
30	435	28,1 7,4	1,7 2,2	30,9 8,2	1,8 2,4	33,7 8,9	2,0 2,7	36,5 9,6	2,2 2,9
40	580	27,7 7,3	2,2 2,9	30,5 8,0	2,4 3,2	33,2 8,8	2,6 3,5	36,0 9,5	2,8 3,8

PA 440 - TABELLA RENDIMENTI - PERFORMANCE CHART ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ

g/min R.P.M. → об/мин.		400		450		500		550	
BAR	P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2	29	29,8 7,9	0,1 0,2	33,5 8,9	0,1 0,2	37,3 9,8	0,1 0,2	41,0 10,8	0,2 0,2
20	290	28,4 7,5	1,1 1,5	31,9 8,4	1,3 1,7	35,5 9,4	1,3 1,9	39,0 10,3	1,5 2,0
30	435	27,3 7,2	1,6 2,1	30,7 8,1	1,8 2,4	34,1 9,0	2,0 2,7	37,5 9,6	2,2 3,0
40	580	26,9 7,1	2,1 2,8	30,3 8,0	2,4 3,2	33,6 8,9	2,6 3,5	37,0 9,8	2,9 3,9