


IDB Series 1100 - 1250

Pompa in ottone a 3 membrane-pistone semi-idrauliche.

Heavy duty brass three piston semi-hydraulic diaphragm pump

Латунный мембранно -поршневойнасос с 3 полугидравлическими узлами.

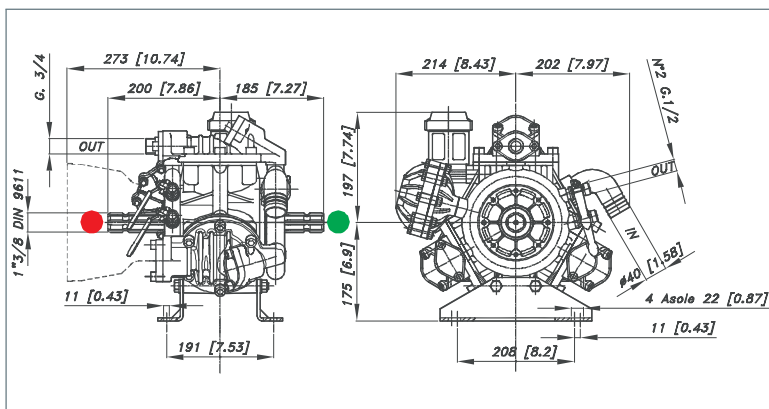

Optional - Optional - По заказу

Caratteristiche tecniche

Specifications

Технические характеристики


g/min; R.P.M.; об/мин;		g/min.	R.P.M.	550	550
Peso - Weight - Bec		Kg	lb	38,9	85,6
Dislivello aspirazione Negative pressure Перепад уровня при всасывании	MAX	mt	ft	1,5	4,9
	Servizio discontinuo Discontinuous service - Прерывистая работа	mt	ft	3	9,8
Ø Aspirazione - Ø Intake - Ø Вход 830		mm	in	40	1" 9/16
Ø Mandata - Ø High pressure - Ø Выход		mm	in	G. 3/4	G. 3/4
Max. Temperatura - MAX Temperature - Макс Температура		°C	°F	60	140
Tipo olio - Oil type - Тип масла		SAE	W	30	30
Capacità olio - Oil capacity - Объем масла		lt	U.S.G.	1,81	0,48

ACCESSORI - ACCESSORIES - АКЦЕССУАРЫ



ACCESSORI D'AZIONAMENTO DRIVE ACCESSORIES

Pag. 105

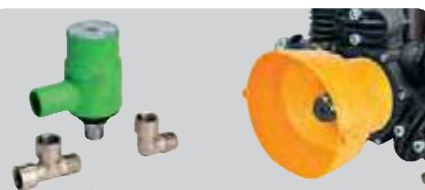

DISPOSITIVI DI SICUREZZA
SAFETY ACCESSORIES

Pag. 106

Pag. 106



FILTRI
FILTERS

Paq. 107



GRUPPI DI COMANDO
CONTROL UNITS

Pag. 92



COMPUTER E PANNELLI
COMPUTERS AND SPRAYERS CONTROL


Paq. 150

ALBERO POMPA - PUMP SHAFT - ВАЛ НАСОСА




ANT. - FRONT - ПЕР.



POST - REAR - ЗАД.



● **POST - REAR - ЗАД.**



IDB 1100

48.5000.97.3 - VD
48.5010.97.3 - VM



110 **29,1**
l/min USGPM



50 **725**
bar P.S.I.

TABELLA RENDIMENTI - PERFORMANCE CHART ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ									
g/min R.P.M. → об/мин	400		450		500		550		
BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	
2 29	80 21,1	0,3 0,4	90 23,8	0,4 0,5	100 26,4	0,4 0,5	110 29,1	0,4 0,6	
20 290	79 20,8	3,1 4,1	88 23,3	3,5 4,6	98 25,9	3,9 5,2	108 28,5	4,2 5,7	
40 580	77 20,4	6,1 8,1	87 22,9	6,8 9,1	96 25,5	7,6 10,1	106 28,0	8,3 1,11	
50 725	76 20	7,4 9,9	85 22,5	8,4 11,2	95 25,0	9,3 12,4	104 27,5	10,2 13,6	



IDB 1250

48.6050.97.3 - VD
48.6051.97.3 - VM



125 **33**
l/min USGPM



50 **725**
bar P.S.I.

TABELLA RENDIMENTI - PERFORMANCE CHART ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ									
g/min R.P.M. → об/мин	400		450		500		550		
BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	
2 29	91 24,0	0,4 0,5	102 27,0	0,4 0,5	114 30,0	0,4 0,6	125 33,0	0,5 0,7	
20 290	89 23,6	3,5 4,7	101 26,6	4,0 5,3	112 29,5	4,4 5,9	123 32,5	4,8 6,5	
40 580	88 23,2	6,9 9,2	99 26,2	7,8 10,4	110 29,1	8,6 11,5	121 32,0	9,5 12,7	
50 725	87 23,1	8,6 11,4	98 25,9	9,6 12,9	109 28,8	10,7 14,3	120 31,7	11,8 15,7	

